


Accessories
Coaxial Tube
For LS-5 Series
LSCT-34-1000

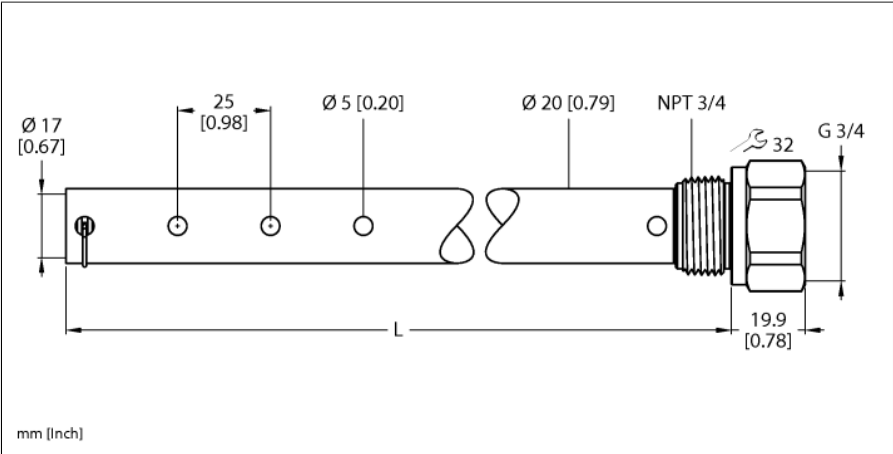

Type	LSCT-34-1000
ID	100015818
Remark to product	Attention: Coaxial tubes (accessories) are only available for LS-551 level sensors with process connection G3/4".

Application area	liquids
Probe length (L)	1000 mm

Mechanical data	
Material	Stainless steel, 1.4571
Process connection	3/4" NPT

Included in delivery	Centering set for LSCT-...
----------------------	----------------------------

- Coaxial tube LS-5 level sensors
- Process connection NPT 3/4"
- Tube length 1000 mm

Functional principle

The level sensors of the LS-5 series work according to the principle of the guided microwave. The so-called Time Domain Reflectometry (TDR) is used. This method emits an electromagnetic wave along the probe. When the wave reaches the medium, it is partially reflected due to the dielectric constant compared to air. The electromagnetic wave is picked up again by the sensor and the distance to the liquid can now be determined via the transit time.

Accessories

Type code	Ident no.		Dimension drawing
LSAB2	100016515	PTFE centering star for mounting probes in the LS-5 product series in LSCT-xx-xxxx coaxial tubes	