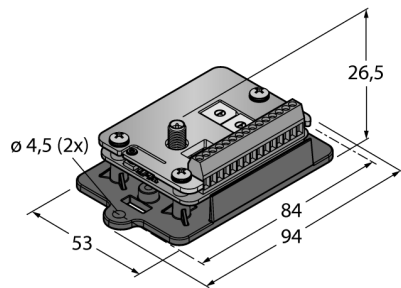


Radio Transmission System

Tree Topology

Teilnehmer mit RS485-Schnittstelle

DX80DR2M-HB1



- External antenna (RG58 RP-SMA connection)
- External terminal strip
- Integrated signal strength indicator
- Configuration via DIP switch
- Modbus RTU (RS485)
- Self-organizing tree structure
- Repeater for extension of network
- Deterministic data transfer
- Frequency hopping FHSS
- Time Division Multiplex Access TDMA
- Transmission power: 63 mW, 18 dBm conducted, ≤ 20 dBm EIRP
- Inputs: 2 x NPN, 2 x 0...20mA
- Outputs: 2 x NMOS, 2 x Switch Power
- FlexPower: 10...30 VDC mains supply or 3.6 VDC via external battery DX81-NB

Type	DX80DR2M-HB1
ID	3017421

Wireless data	
Type of radio	short-range
Installation	stationary
Topology	Star topology
Function	Tree topology
Device type	Node
Frequency band	2.4-GHz ISM band
Frequency range	2.402 - 2.483 GHz
Number of radio channels	50
Channel width	1 MHz
Spread spectrum technology	FHSS (Frequency Hopping Spread Spectrum)
Single-Carrier Residence Time	7.8 ms
Response time typical	< 1000 ms
Output power ERP	18 dB/65 mW
Output power EIRP	20 dB/100 mW

I/O data	
Number of channels	2, 2
Input type	NPN, 0...20 mA
Number of channels	2, 2
Output type	NMOS, switch power
Communication protocol	Modbus RTU RS485

Electrical data	
Runs with battery	Yes
Operating voltage U _s	3.6...5.5 VDC
Power-on indication	LED, Green

Functional principle

The DX80 Data Radios are self-organizing. They create a network in tree topology. They transfer Modbus RTU telegrams or other data from other bus systems. The telegrams are routed through the network and lost radio communication is compensated via alternative routes. Further sensors can be added to the network and their data is accessible via internal registers. Each network consists of a master and an unlimited number of repeaters or slaves. The device type is adjusted via DIP switch. This system can be combined with several DX80 networks to transfer data from the DX80 gateway via Modbus RTU to the control system.

FCC-ID UE300DX80-2400. This device complies with FCC para. 15, subpara. C, 15.247
ETSI/EN: In compliance with EN 300 328: V1.8.1 (2014-04)






IC: 7044A-DX8024

Radiation protection 10 V/m for 80-2700 MHz acc. to EN 61000-6-2

Shock and vibration resistant: IEC 68-2-6 and IEC 68-2-7

Mechanical data	
Design	Rectangular, DX80DR
Housing material	Plastic, FR4 circuit board
Antenna connection	RP-SMA female connector
Ambient temperature	-20...+80 °C
Relative humidity	0...95%
Protection class	IP00
Tests/approvals	
Approvals	ATEX II 3 G

Function accessories

Type code	Ident no.		Dimension drawing
BWA-2O6-A	3081081	External antenna 6 dBi, N-female	 A vertical antenna with a threaded base. The total height is 400 mm. The base has a diameter of 29 mm.
BWA-2O8-A	3081080	External antenna 8.5 dBi, N-female	 A vertical antenna with a threaded base. The total height is 600 mm. The base has a diameter of 29 mm.
BWA-2O2-C	3077816	Internal antenna 2 dBi, RP-SMA male, standard	 A vertical antenna with a 90-degree bend. The top section has a diameter of 8 mm and a length of 82 mm. The bottom section has a diameter of 10 mm and a length of 26 mm. The bend radius is 9.2 mm.
BWA-2O5-C	3077817	Internal antenna 5 dBi, RP-SMA male	 A vertical antenna with a 90-degree bend. The top section has a diameter of 7 mm and a length of 235 mm. The bottom section has a diameter of 13 mm and a length of 30 mm. The bend radius is 9.2 mm.
BWA-2O7-C	3077818	Internal antenna 7 dBi, RP-SMA male	 A vertical antenna with a 90-degree bend. The top section has a diameter of 13 mm and a length of 166 mm. The bottom section has a diameter of 13 mm and a length of 30 mm. The bend radius is 9.2 mm.